

WilsonPro A1010

3G/4G 2100 IMT (BAND 1) / 1800 DCS (BAND 3) / 900 E-GSM, GSM (BAND 8)


FEATURES


- Boosts 4G LTE & 3G signals for large homes and offices
- Coverage area up to 1,000 m²
- For multiple devices and users
- Works on ALL cellular devices with ALL carriers simultaneously
- Enhances talk, text, and high-speed 4G LTE internet



LTE FASTEST NETWORK SPEEDS

 UP TO 1,000 m² COVERAGE

 UP TO +70 dB GAIN

 MULTI-USER WIRELESS BOOSTER

About

The WilsonPro A1010 cell phone signal booster is a powerful 4G building booster. WilsonPro A1010 is professional grade, allowing users to get better voice and data with fewer dropped calls, improved voice quality, faster uploads and downloads. This A1010 Booster increases cell signals up to 32x and enhances 4G LTE and 3G signals for buildings up to 1,000 m². Quick and easy installation with easy instructions from our Quick Install Guide.

All boosters come with a 1-year warranty.

Kit Includes



WilsonPro A1000



Power Supply (859116)


Specifications

Coverage Area

IF YOUR OUTSIDE SIGNAL IS	YOUR BOOSTED SIGNAL MAY BE
●●●● -89 AND LOWER About 5 bars	UP TO 1,000 m ²
●●●● -90 dB About 3 to 4 bars	UP TO 500 m ²
●●●● -100 dB About 1 to 2 bars	UP TO 250 m ²
○○○○○ No existing	A signal booster likely will not work

MODEL NUMBER	510012
FREQUENCIES	Band 1 2100 MHz
	Band 3 1800 MHz
	Band 7 2600 MHz
	Band 8 900 MHz
MAX GAIN	80dB(B1) / 74dB(B3) / 70dB(B8)
IMPEDANCE	50 Ohm
POWER	5.5V DC, 1.5A
CONNECTORS	N-Female
NOISE FIGURE	5dB nominal
DIMENSIONS	22.23 x 21.59 x 5.72 cm / 1.25 kg

Installation

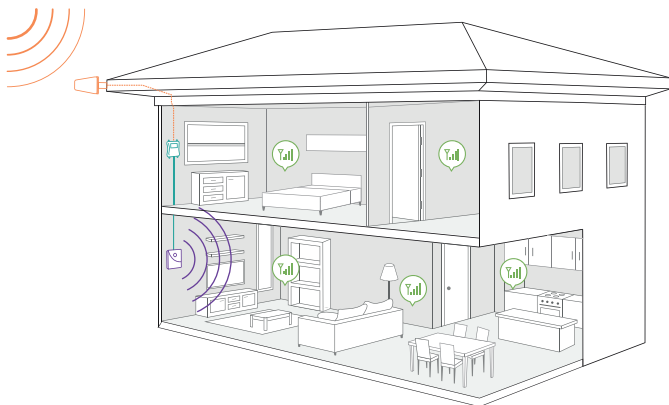

- 1 Receives signal:** The powerful antenna reaches out to access a voice and 3G, 4G, and LTE data signal, and delivers it to the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

Available Accessories

Optional Antenna Kits



4G Interior Wall
Mount Panel
Antenna
(311135)



Lightning Surge
Protector 50 Ohm
(859902)



Splitter -3 dB 2
Way
(859957)



Wilson 400 Ultra
Low-Loss Cable 2ft
(952302)



Wilson 400 Ultra
Low-Loss Cable
20ft.
(952320)



N-Female to
N-Female Barrel
Connector
(971117)